


**Thermal Imaging and Temperature Profiles
for Continuous Process Monitoring
and Quality Control**

805774 LSP_{HD} I/O Processor 2

The LSP_{HD} I/O Processor is a configurable system to provide access to processed data in the LSP_{HD} system. Its compact DIN rail mounted footprint combined with a standard ethernet interface allows it be located away from the harsh measurement environment and mounted discretely in existing equipment cabinets.

LSP_{HD} I/O - Key Features

- + Flexible configuration to meet individual plant requirements - a single processor can be interfaced with up to 8 LSP_{HD} heads
- + Independent operation - the processed data is supplied directly from the LSP_{HD} head ensuring data availability independent of PC operation
- + Expansion Capabilities - additional modules can easily be added in the field as the need for additional processed data arises

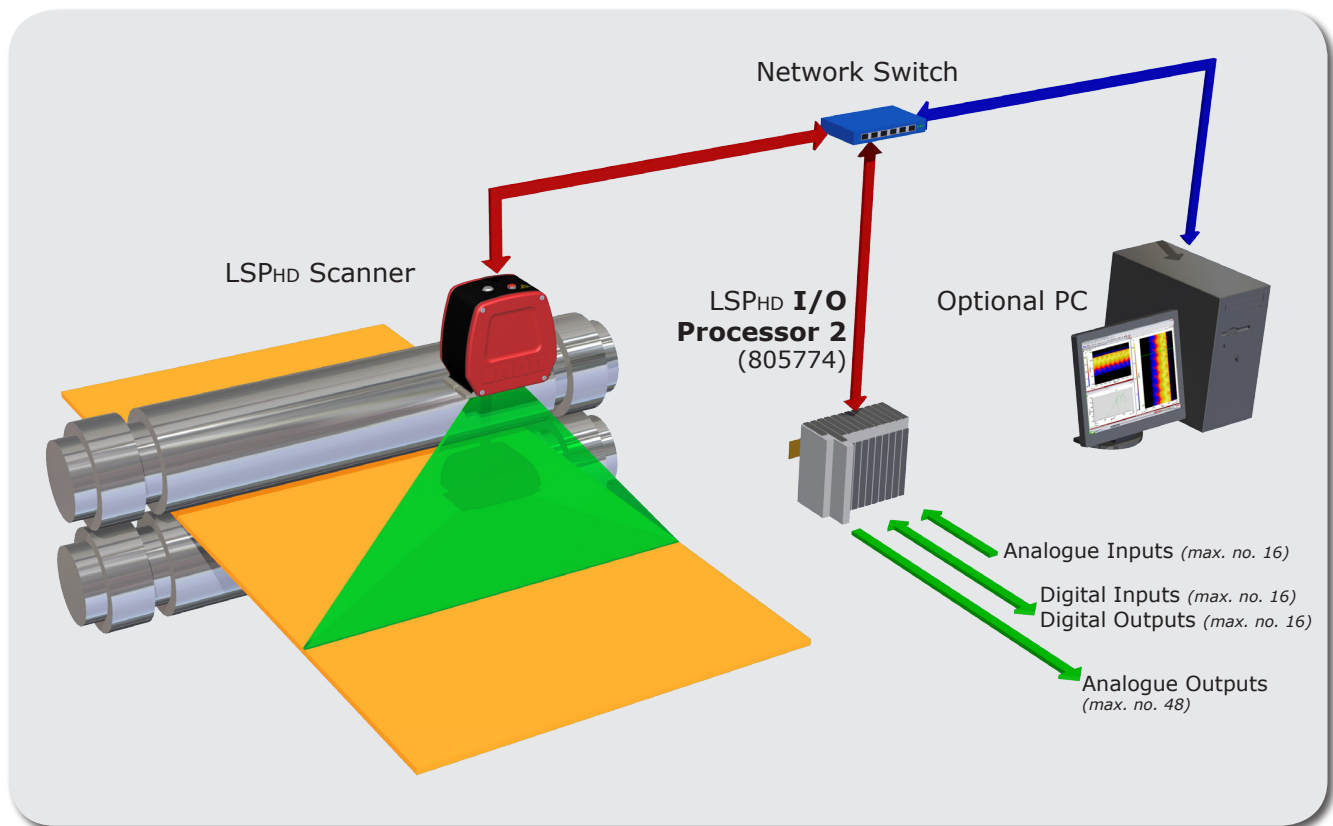

Performance Specifications LSPHD I/O Processor

LSPHD I/O Processor Core Module

LSPHD I/O Processor 2, Part Number:	805774
Incoming Data Connection:	RJ45 ETHERNET
Alarms:	System Alarm, Remote Client Alarm
System Status:	Indicated via LED

Analogue Output Module

Number of Outputs:	4
No. of Modules:	3
Signal Current:	0 to 20mA
Load:	<350 Ω (short-circuit-proof)
Measuring Error:	<0.1% (relative to full scale value)
Resolution:	12 bits
Conversion Time:	~ 250 μ s

Digital Output Module


Number of Digital Outputs per module:	4 x make contacts
No. of Modules:	3
Rated Load Voltage:	125 V AC / 30 V DV
Ohmic Switching Current:	0.5 A AC/ 2 A DC
Minimum Permitted Load:	10 μ A at 10 mV DC
Operating Cycles Mechanical (minimum):	1 x 10 ⁸
Operating Cycles Electrical (minimum):	2 x 10 ⁵ (1 A/30 V DC)

Digital Input Module

Number of Digital Inputs per module:	4 x make contacts
No. of Modules:	2
Nominal Voltage:	24 V DC (-15%/+20%)
'0' signal voltage:	-3 to +5 V (EN 61131-2, type 3)
'1' signal voltage::	15 to 30 V (EN 61131-2, type 3)
Input Current Typ.:	3 mA (EN 61131-2, type 3)
Input filter:	3.0 ms

Analogue Input Module

Number of Inputs:	2
No. of Modules:	2
Signal current:	0 to 20 mA
Internal Resistance:	33 Ω typical + diode voltage
Input Filter Limit Frequency:	33 kHz
Common-mode Voltage U_{cm} :	10 V maximum
Conversion Time:	~ 50 μ s (fast mode ~ 35 μ s)
Resolution:	16 bit (incl. sign)
Measuring Error:	< \pm 0.3% (relative to full scale variant)
Surge Voltage Resistance:	35 V DC



Land Instruments International
Stubley Lane, Dronfield
S18 1DJ
United Kingdom

Tel: +44 (0) 1246 417691
Email: land.enquiry@ametek.com
www.landinst.com

AMETEK Land - Americas
150 Freeport Road,
Pittsburgh, Pennsylvania, 15238
United States of America

Tel: +1 (412) 826 4444
Email: land.enquiry@ametek.com
www.ametek-land.com

AMETEK Land China Service
Part A1 & A4, 2nd Floor Bldg. 1
No. 526 Fute 3rd Road East,
Pilot Free Trade Zone 200131
Shanghai, China

Tel: +86 21 5868 5111 ext 122
Email: land.enquiry@ametek.com
www.landinst.com

AMETEK Land India Service
Divyasree N R Enclave, Block A,
4th Floor, Site No 1, EPIP Industrial Area
Whitefield, Bangalore- 560066
Karnataka, India

Tel: +91 -80 67823240
Email: land.enquiry@ametek.com
www.landinst.com